


# MOL 1650 / 2540

## OIL BURNER


486 - 2538 kW

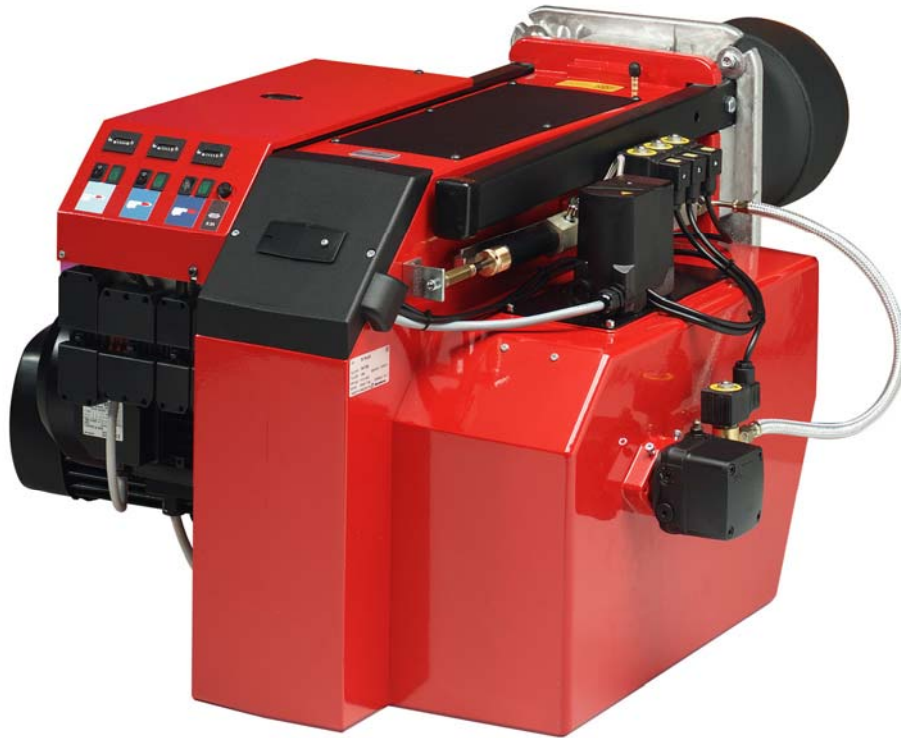

- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble-free
- Designed and approved in accordance with the European Standard EN 267
- Suitable for high resistance boilers
- Industry standard components easily available
- Designed for 2 or 3 stage operation with 3 nozzles
- Plug-in contact facilitates the installation
- With servo motor air adjustment
- With diffuser plate optimiser
- All kW ratings are in nett CV

**NU-WAY**

Type		MOL 1650	MOL 2540
Capacity	kW	486-1649	593-2538
Motor	V/Hz kW / A (Fuse) + A (control fuse)	400/50 3.0 / 3 x 16 + 6	400/50 5.5 / 3 x 20 + 6
Start / Run Current	Amps	43 / 6.5	87 / 11.5
Control box		Landis & Staefa	
Fuel pump		Danfoss	
Air damper motor		•	
Gross weight	kg	127	150
Volume	m <sup>3</sup>	0.9	0.9

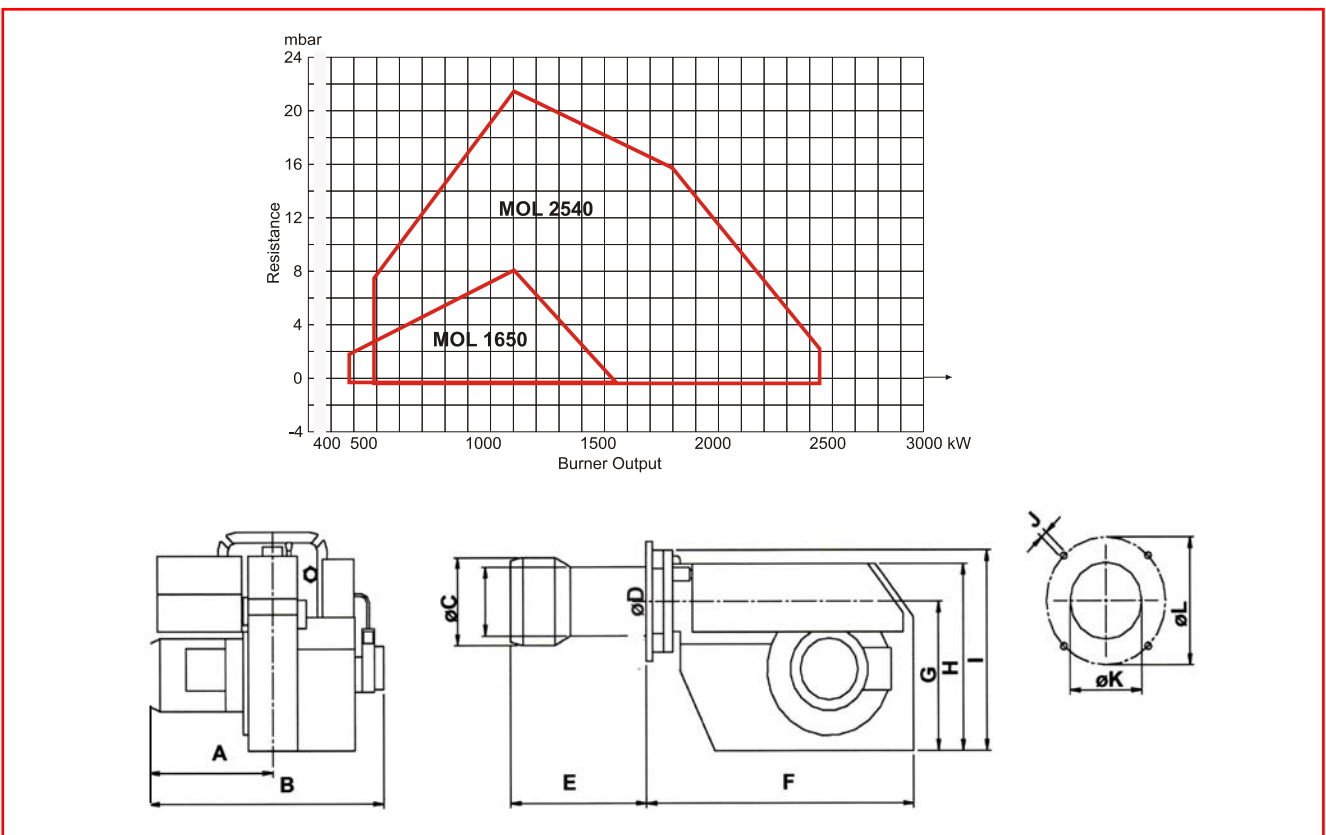

Burner	A	B	øC	øD	E*	F	G	H	I	J	øK	L
MOL 1650	425	805	220	205	324	730	408	504	538	14	206	310-380
MOL 2540	435	815	261	206	356	730	408	504	538	14	206	310-380

\* Extended Lengths Available

	3-nozzle	Servo motor	Diffuser plate optimiser	Hydraulic air regulation
MOL 1650-3H MOL 2540-3H	•			•
MOL 1650-3R MOL 2540-3R	•	•	•	

### PLASMA ENERGY CO.,LTD.

98/13 MOO1 NAKORNIN RD. T.BANGKUWEANG  
A.BANGKRUAI.NONTHABURI 11130 ( THAILAND )  
Tel: (662) 449-4900 (Auto)  
FAX:(662) 496-2247  
e-mail :info@plasma-energy.co.th  
website : http://www.plasma-energy.co.th